



Copyright © 2019-2024 SubDude Audio LLC, Idaho, USA. All Rights Reserved. Reproduction, transmission or redistribution of this document or its contents without written permission is prohibited.

Take your time, follow the instructions, relax, and enjoy yourself!

WARNINGS: Perform installation with your pinball machine turned off and unplugged from AC power.



PixelWav non-US Power Connection


AC Power Warning

- If you are not qualified or not confident in performing pinball machine wiring, employ a qualified professional to complete this installation.

FIXLWNV

Locate AC Power Cord

- Locate the AC Power Cord at the rear of the backbox.

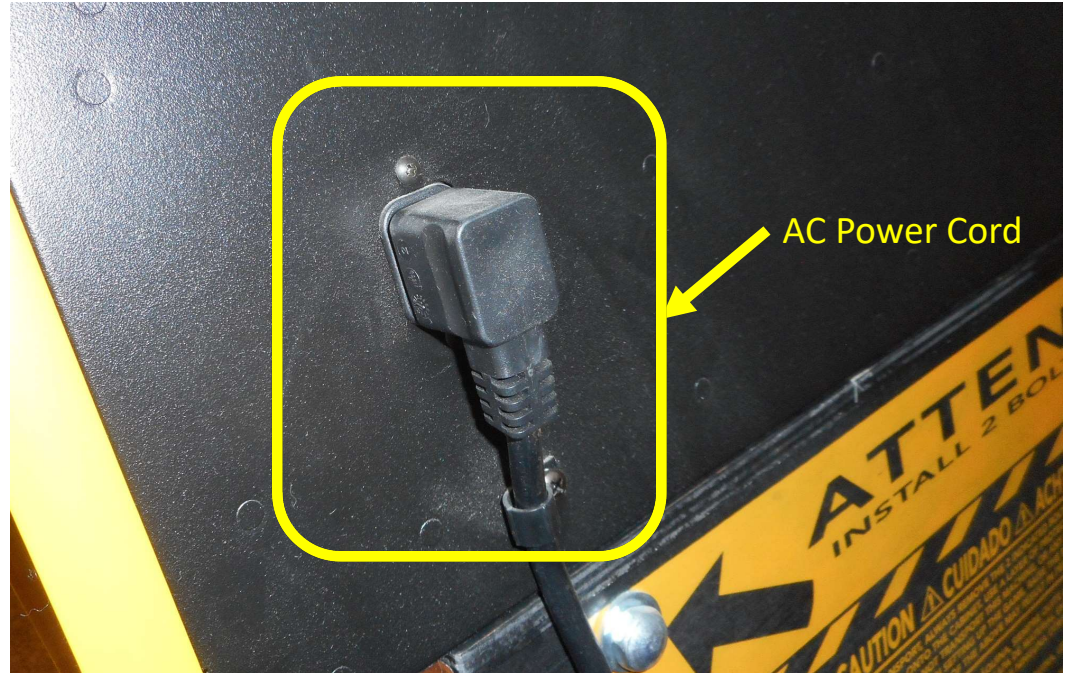

FIXLWNV

Disconnect AC Power Cord


- Un-plug the AC power cord before proceeding.



FIXLWNV

Locate the Back-Side of the Power Switch

- Located in the backbox on the right side, bottom.
- The power switch may be installed as shown. OR it is possible that the factory has reversed the direction on the switch. Follow the images carefully on the subsequent steps and if your switch is reversed compared to what is shown, use the row number indicated in the remaining pages.

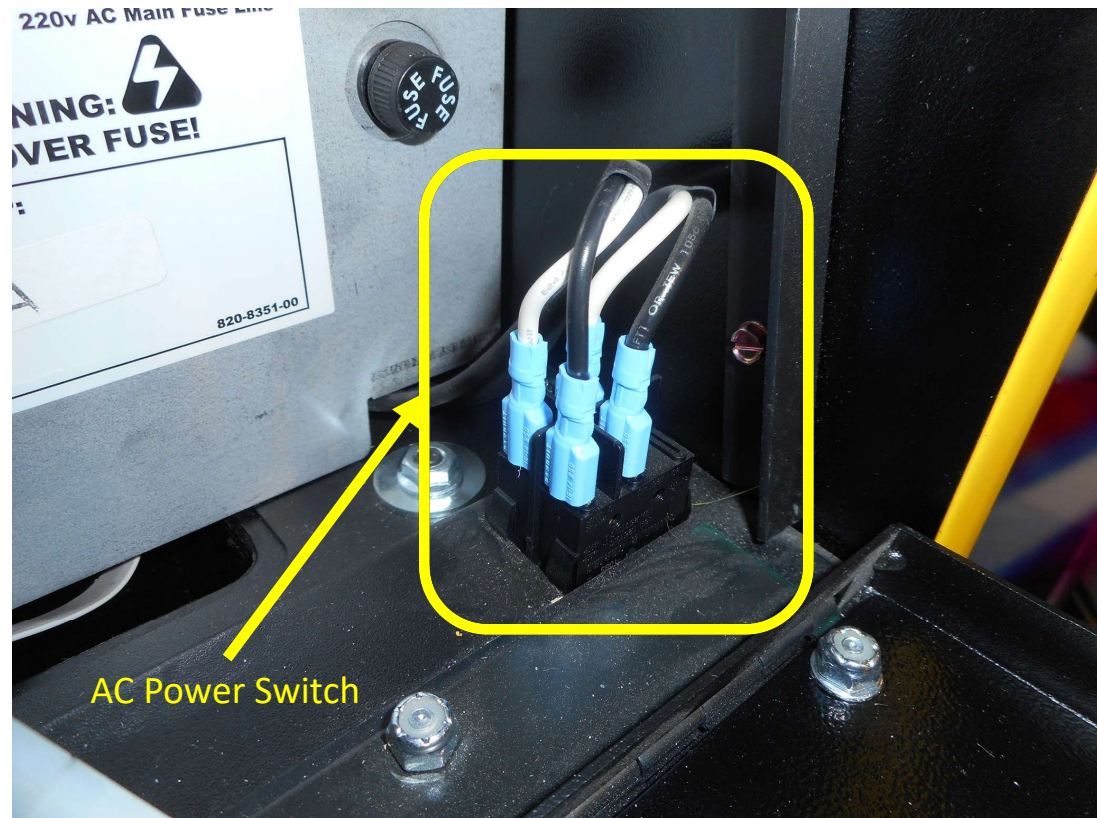

FIXLWNV

Un-Plug Row 2


- Unplug the connectors labeled “2” as shown.
- **Make certain that you have disconnected the AC power cord before performing this and subsequent steps!**
- **Otherwise, there is a high risk of electrical shock!**



FIXLWNV


Non-US Power Connector

- Shown to the right is the non-US Power Connector.
- Wire colors may vary.
- Take note of the red connectors. They serve a dual purpose. They can plug to the spades on the power switch shown in the previous step, and they also provide a new spade for the next step.

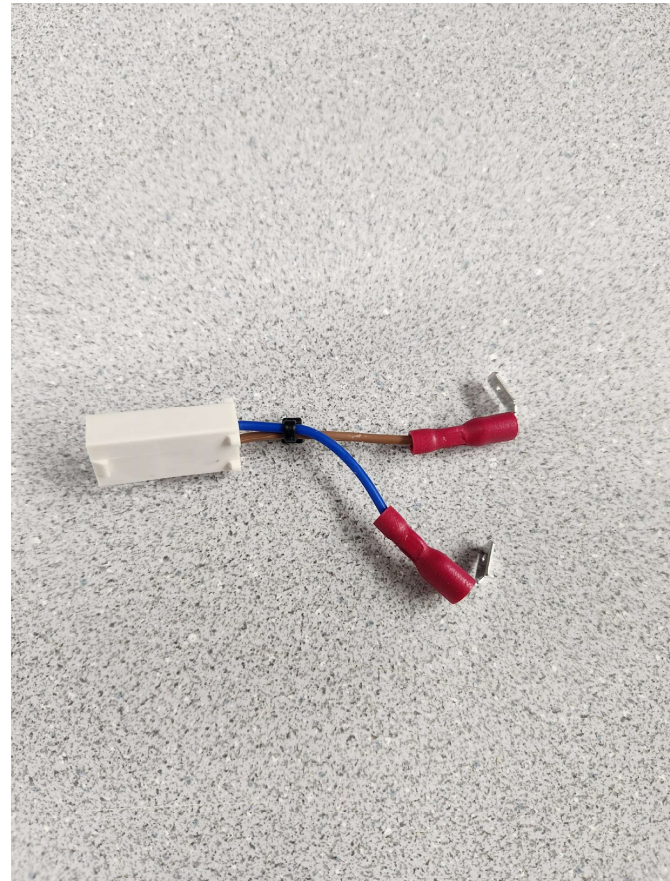

Attach the non-US Power Connector

- Plug the blue factory connectors to the red piggyback connector spades as shown.
- The polarity / wire color assignments do not matter.

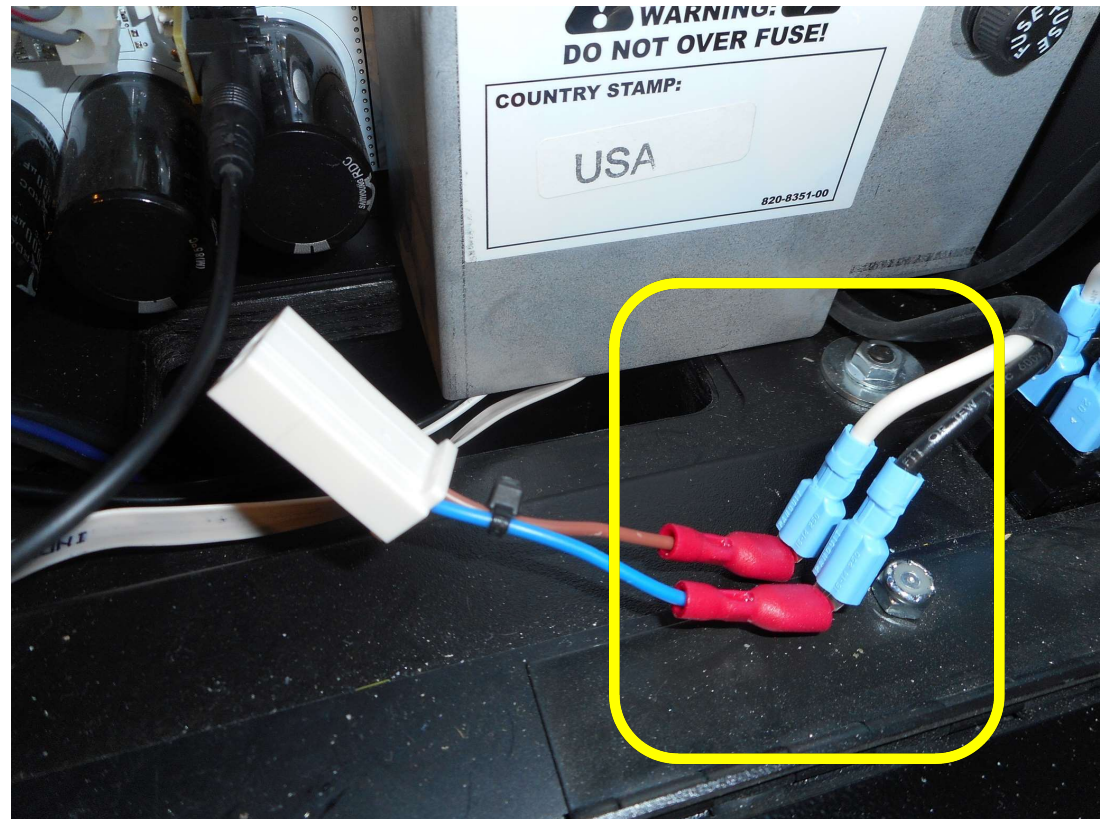


Install the non-US Power Connector

- Plug the red connectors to row "2" of the switch.



Connect the Power Adapter Plug

- Join the power adapter plug as shown.
- Complete your lighting kit installation at this time.

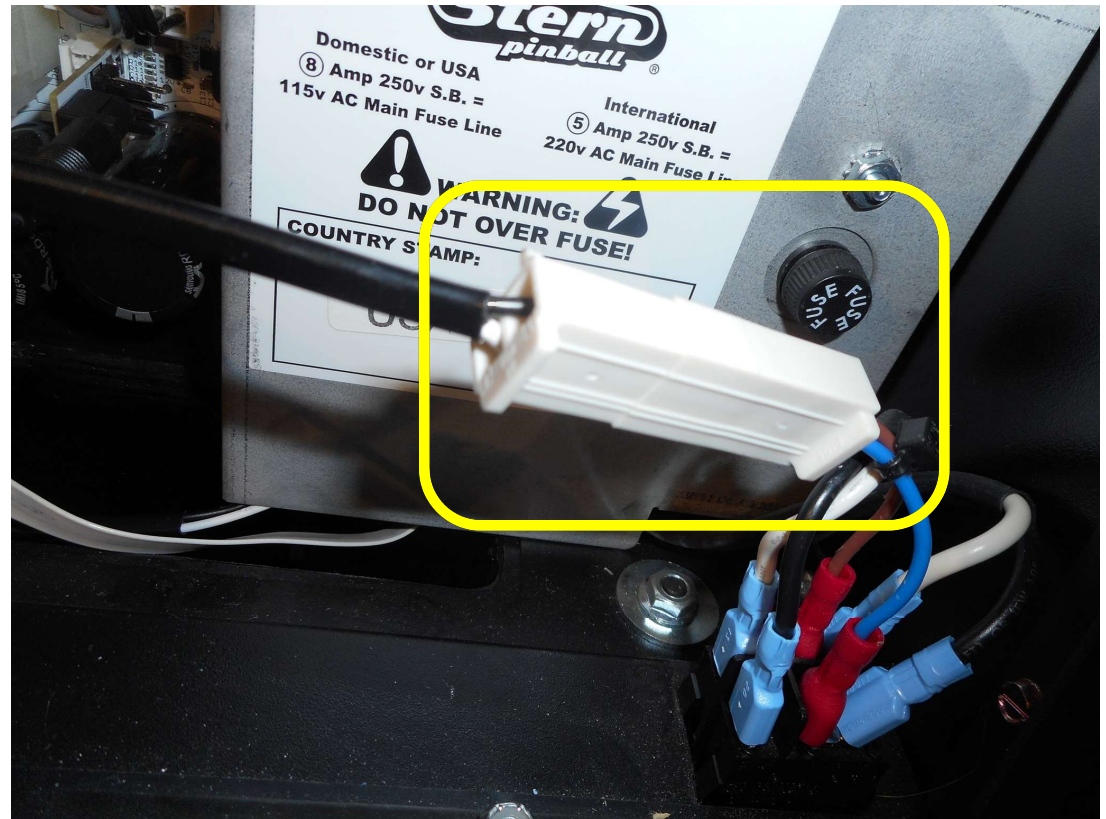

FIXLWNV

Re-Connect AC Power Cord

- At this time, re-connect the AC Power Cord.



FIXLWNV

FLEXLINK

End of Document