

PINWOODFER

Copyright © SubDude Audio LLC, Idaho, USA. All Rights Reserved. Reproduction, transmission or redistribution of this document or its contents without written permission is prohibited.

Take your time, follow the instructions, relax, and enjoy yourself!


WARNINGS: Perform installation with your pinball machine turned off and unplugged from AC power.



PinWoofers Spike-2 Stern Speaker Light Spacer Instructions

Locate Provided Spacers

- Two backbox mounting spacers are provided, as shown to the right.

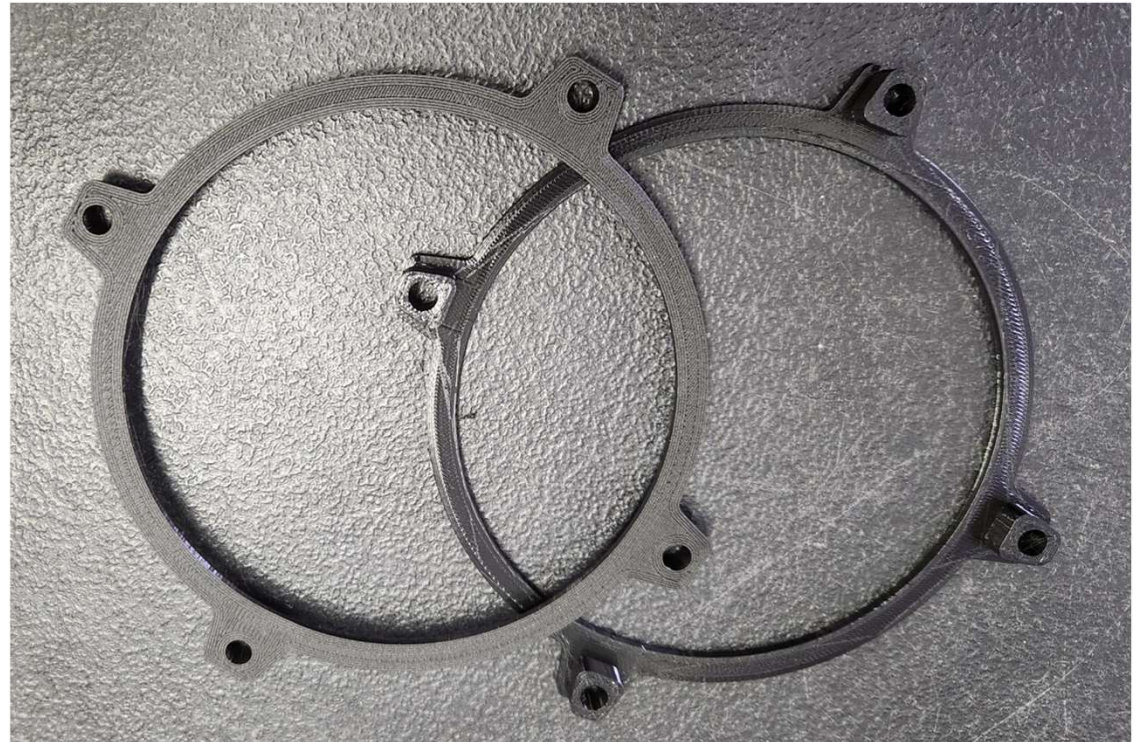

Locate Mounting Hardware


- Eight each #8 flat washers and #6-32 Binding Screws are provided.



PINWOOFER

Place Provided Spacer Ring on Factory LED Speaker Mount

- Remove the currently installed backbox speaker.
- Place a provided spacer on the LED ring as shown:
 - The Limited Edition Ring is shown.
 - Pro and Premium Ring with the shelf follow the same progression. This kit will allow the speaker to undergo excursion and remained sealed with an integrated gasket.

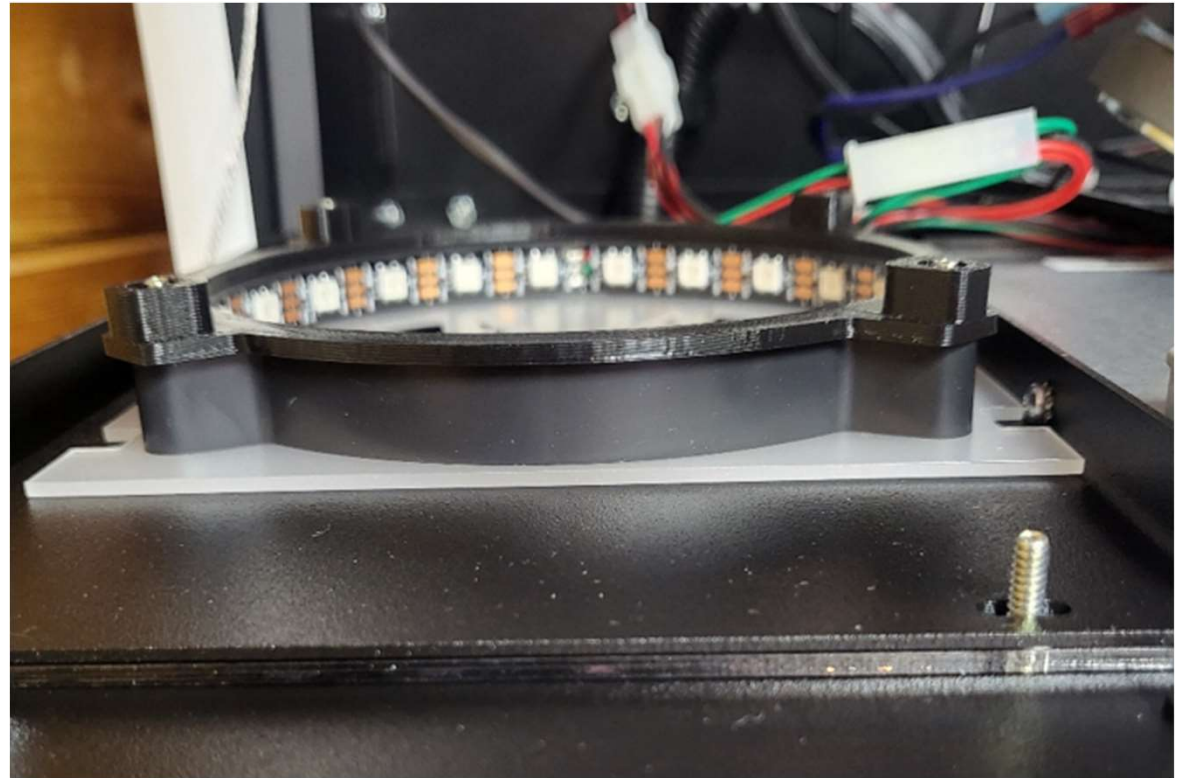

Top View of Spacer


- Shown in the image is the top-down view of the speaker when placed on the mounting spacer.




PiNWOODFER

Add Screws

- It is recommended that you start each screw / washer pair by hand but do not tighten.
- After you've placed the screws, go ahead and tighten. Tighten well, but do not use excessive force because that can stress the panel stud or other components in your stack-up.

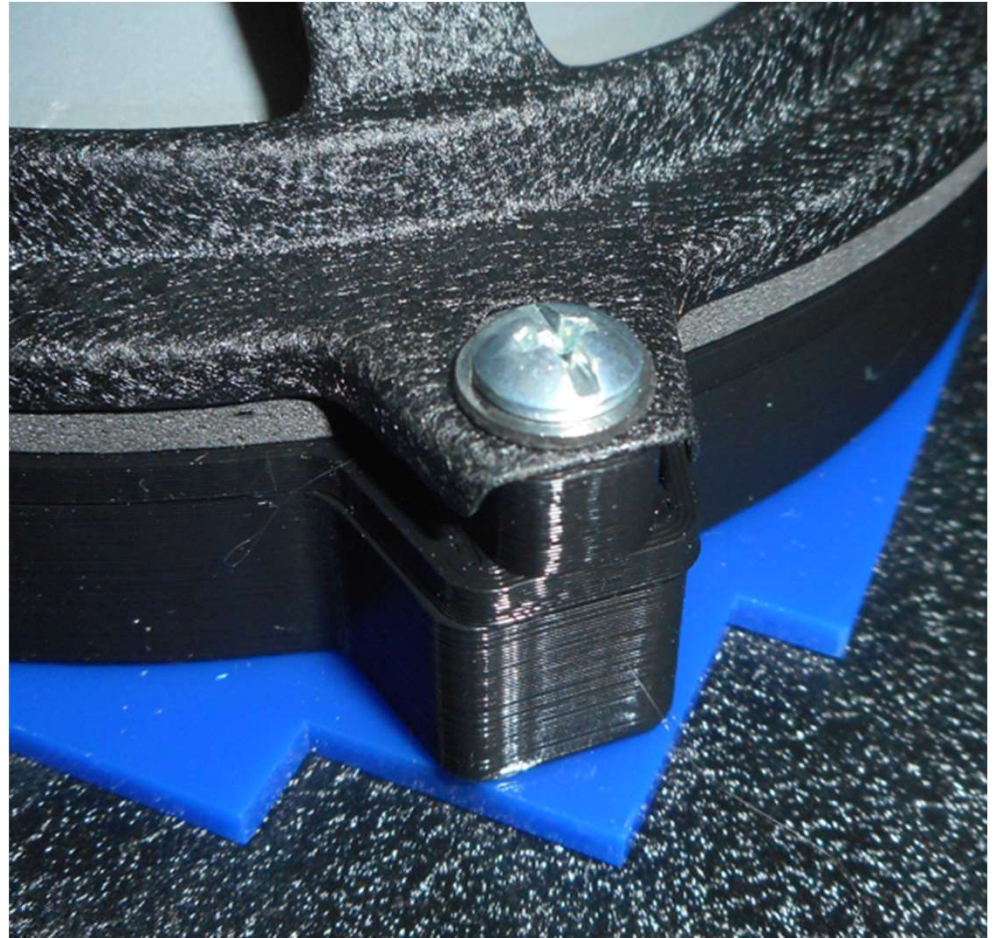

View of Mounted Speaker

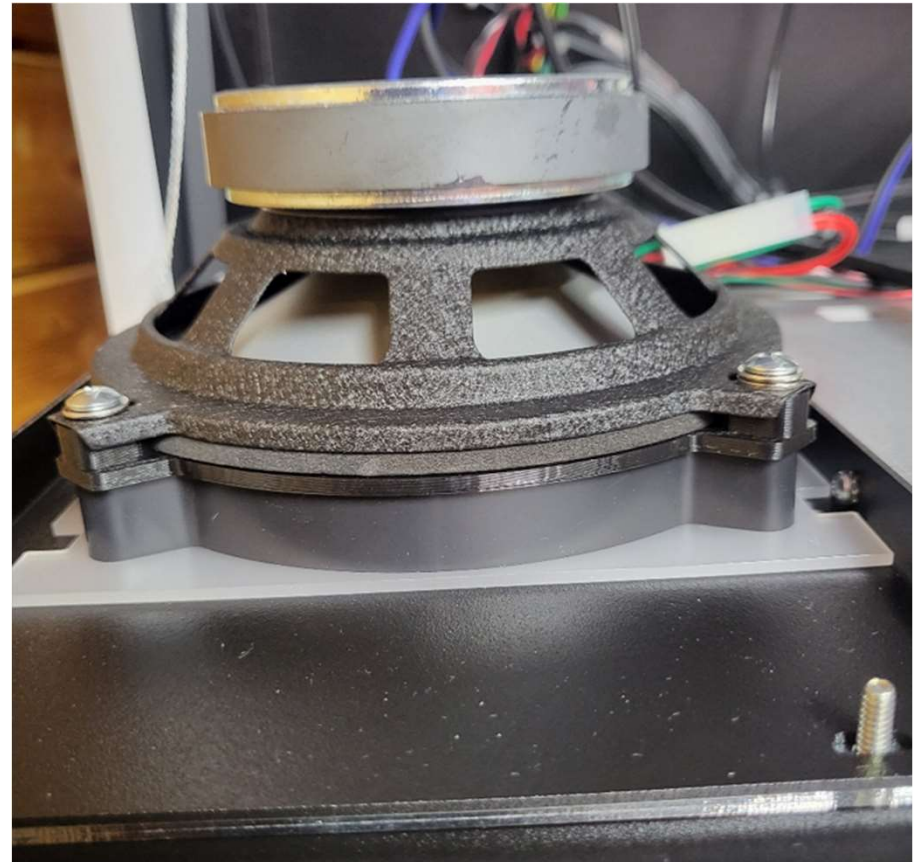

FINWOODSER

End of Document