



PINWOOFER

PinWoofers™

5.25in Spike-2 Ring Spacer Assembly and Installation Instructions

Copyright © 2019-2021 SubDude Audio LLC, Idaho, USA. All Rights Reserved. Reproduction, transmission or redistribution of this document or its contents without written permission is prohibited.

Take your time, follow the instructions, relax and enjoy yourself!


WARNINGS:

- Perform installation with your pinball machine turned off and unplugged from AC power.

5.25in Spike-2 Ring Spacer Assembly

Speaker Panel Studs

Shown is a Spike-2 speaker panel with 1" #6-32 studs.

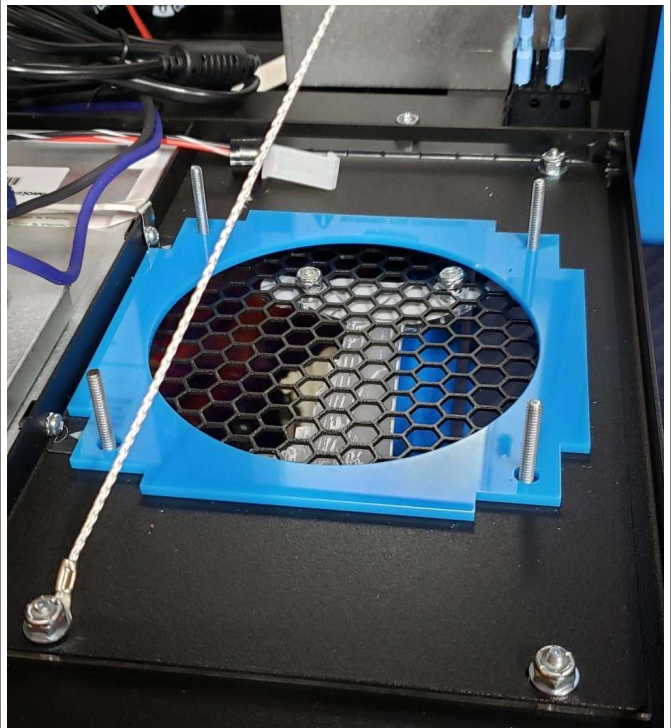


PinWoofers 5.25in LE Spacer Ring

Drop the PinWoofers ring into place. The oversized holes in the ring allow you to adjust and center the ring concentric to the round speaker panel and / or acrylic opening.


Add #6 flat washers and #6-32 locking nuts.

CAUTION: Hand tighten and do not over tighten (or use a cordless drill) and risk breaking the studs off at the stud base weld.

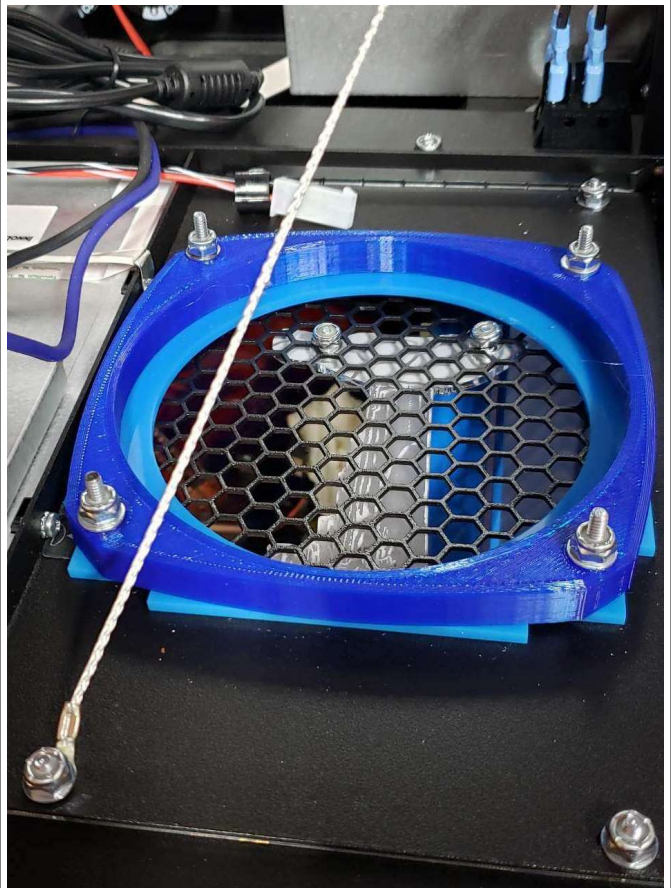

Mount Speaker

Set the speaker over the exposed studs and add #6 flat washers and #6-32 locking nuts. Hand tighten securely.

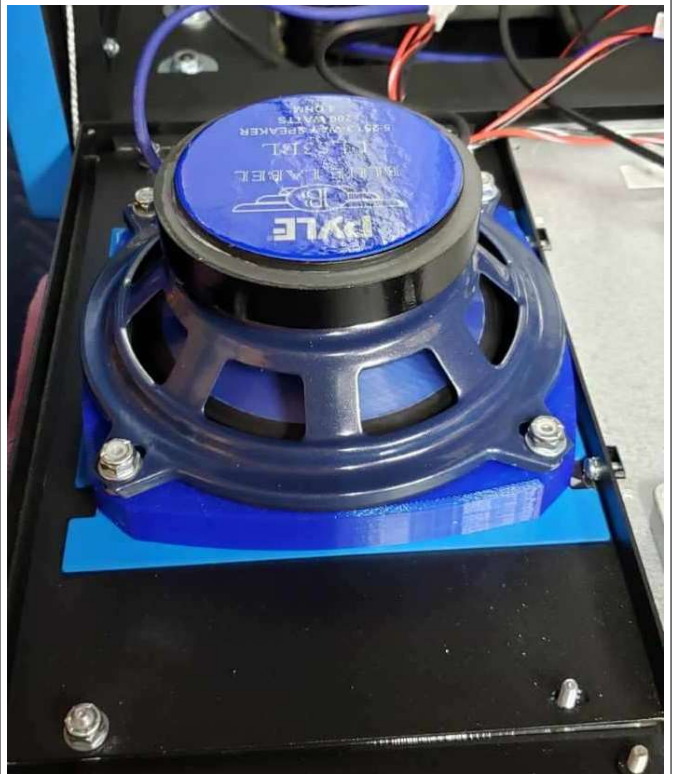

Our Sincerest Thanks for Choosing PinWoofers!