



PINWOOFER

PinWoofers™

WPC Backbox Speaker Installation Instructions

Copyright © 2019-2021 SubDude Audio LLC, Idaho, USA. All Rights Reserved. Reproduction, transmission or redistribution of this document or its contents without written permission is prohibited.

Take your time, follow the instructions, relax and enjoy yourself!


WARNINGS:

- Perform installation with your pinball machine turned off and unplugged from AC power.

WPC Backbox Speakers

Remove Existing Backbox Speakers

It is recommended that you completely remove the speaker panel for easier access and removal of the existing backbox speakers.

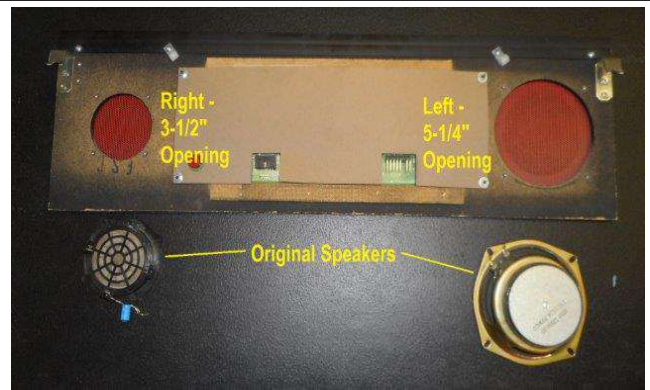

Mount the Right Interposer

Pictured is the right interposer, installed onto the speaker panel. Use the included #8-32x1/2" screws to secure the ring to the factory T-nuts already present in the panel.




Mount the Right Speaker

Pictured is the right, 5-1/4" speaker that has replaced the original 3-1/2" speaker.



Mount the Left Speaker

The left speaker bolts directly through the speaker frame, through the interposer, and into the factory T-nuts already present on the speaker panel. Use the provided #8-32x1" screws provided with your kit.

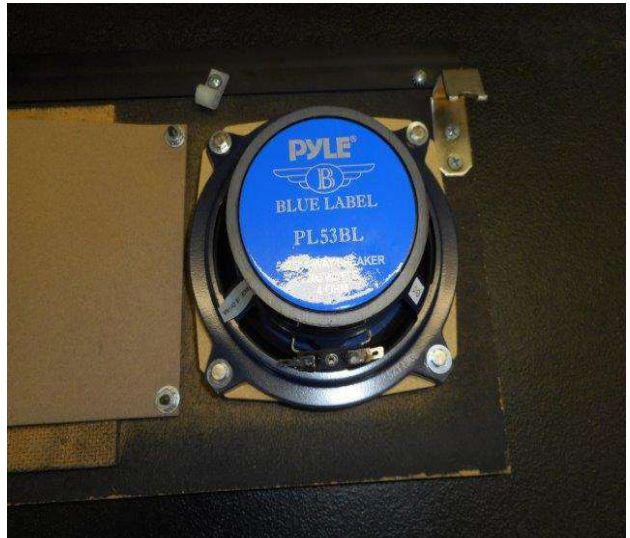

Review of the Completed Speaker Panel

Pictured is a view of the completed speaker panel.



Our Sincerest Thanks for Choosing PinWoofers!